





## Dual Power Supply Adapter · DPS-12/48

The DPS-12 (+12V) and DPS-48 (48V) kits add power supply redundancy to the Davicom units by allowing two power supplies to be connected in parallel, ensuring a fail-safe operation in case of supply failure.

DPS-12 Male connectors pinout

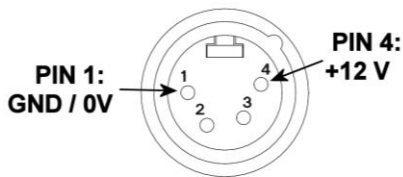

DPS-48 Male connectors pinout

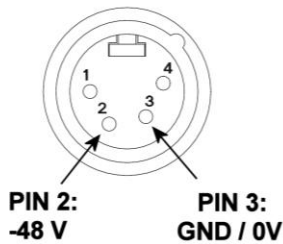

The DPS can carry up to 3A of continuous current in each branch with very low (<0.5V) voltage drop. Total length is 30cm (12").

### ELECTRICAL SPECIFICATIONS

Maximum current:	3A per branch
Inline voltage drop:	< 0.5V per branch
Max reverse voltage:	60V

